

FALL PROTECTION

DON'T TAKE THE PLUNGE.

A PERSONAL FALL ARREST SYSTEM IS MANDATORY AND VITAL FOR WORKER PROTECTION. THE DESIGN & CRAFTSMANSHIP OF YOUR HARNESS AND FALL PROTECTION EQUIPMENT DIRECTLY INFLUENCES YOUR SAFETY, COMFORT, CONFIDENCE, PRODUCTIVITY AND VERSATILITY WHILE WORKING AT HEIGHTS OR IN A CONFINED SPACE.

It is vital you select a solution that is suited to your application.

Fall protection equipment is constantly evolving and the options can become overwhelming. We can arrange 'Truck Demos' & 'Toolbox Talks' with a fall protection expert to make sure you select the right gear and you know how to use it properly. We can also organize certified fall protection training to ensure all your staff know how to use their fall protection equipment correctly. Hands on training courses are available. *Contact us for more information: 1.800.665.1564*

CONFINED SPACE RESCUE SYSTEMS



CONFINED SPACE RESCUE

When it comes to confined space entry/rescue, it is essential that equipment operates perfectly and quickly. Safety engineers and site directors trust DBI Sala for the type of high quality, rugged systems that will ensure top performance when it is needed the most. DBI systems meet applicable industry standards and can be customized to meet specific requirements.

WHAT TO LOOK FOR IN A CONFINED SPACE SYSTEM

Ease of Use

Your systems must provide you with the ability to handle a crisis simply, flawlessly and immediately. During an emergency, time is of the essence.

Mechanical Systems

Lifeline type and length are just a few of the options your system may need. In some situations a backup system may be required.

Durability

All system components must be made from quality materials strong enough to endure rough handling and exposure to the elements.

Versatility

Your system should be adjustable and adaptable to extreme environments and uneven terrain. A modular design is also helpful, allowing you to add to the system over time.

Strength

Your system must be rated for your application, such as fall arrest, rescue, man-riding or material handling. Choose one that maximizes strength and minimizes weight.

Portability

Your system should be lightweight, easy to transport, set-up and store. Remember, in an emergency situation, every second counts.



MOBI-LOK™ SPECIALTY ANCHORAGE



MOBI-LOK™ SPECIALTY ANCHORAGE CONNECTORS

Self-contained vacuum anchor systems provide a tie-off point on virtually any smooth, non-porous surface simply by flipping a switch and waiting for a green light.

- Fall arrest tested and approved, OSHA approved.
- Lightweight design (under 9kg/20lbs) for easy transport.
- Fail-safe backup systems with audio alarms and vacuum level indicator.
- Rubber seals secure anchor without damaging surface.
- Can be used with horizontal lifeline systems for added mobility for two workers.

MOBI-LOK™ for General Industry

Self-contained vacuum anchor assembly with bottle attachment and carrying case. Powered with a single on-board 7.87 cubic-meter/48 cubic-inch compressed gas bottle (order separately), or a large capacity detached bottle, or shop air. Unit can also power one additional secondary pad.

2200095

MOBI-LOK™ General Industry

Self contained vacuum anchor without bottle attachment.

2200094

MOBI-LOK™ General Industry

Self contained vacuum anchor secondary pad.

2200096

MOBI-LOK™ ACCESSORIES

Compressed Gas Cylinder

2200078

Fill Station

Fills compressed gas cylinder (2200078) from bulk nitrogen cylinder.

2200086

Secondary Pad Hose 15m (50')

For connecting secondary pads to self contained vacuum anchor.

2200130

FORCE2™ Shock Absorbing Lanyard

Web loop choker at one end, aluminum carabiner at the other. 1.8m (6').

1225013

Sayflite™ Horizontal Lifeline System 12m (40')

For connection between two or more pads to create continuous protection for two or more workers.

2200400



ADVANCED DAVIT ARM SYSTEMS

Variable offset davits are designed for use where multiple offset masts are required. The variable offset masts may be equipped with front-mounted and/or back-mounted winches or SRLs and feature an anchor point rated up to 22kN (5,000lbs) depending on pin position. For applications with overhead clearance restrictions, the adjustable height of the variable offset masts can eliminate the need for custom length masts and mast extensions. Quick connect/release pins allow for fast and easy set-up, dismantle and transportation.

Contact Treen today to discuss how we can customize your confined space rescue system.

EXOFIT NEX™ HARNESSSES



ExoFit NEX™ Construction Style Harness

Duo-Lok™ quick connect buckles, Revolver™ vertical torso adjusters, hip/belt padding, Tech-Lite™ aluminum D-rings with stand-up back D-ring, repel technology webbing, integrated trauma straps, reflective material and impact indicator stitches, breakaway lanyard keepers, carrying pocket on chest and covered labels. Max Capacity 190kg (420lbs). Harness weight 1.6kg (3.6lbs).

SMALL: [1113121C](#) MEDIUM: [1113124C](#) LARGE: [1113127C](#) X-LARGE: [1113130C](#)
SKU: 7030.259



ExoFit NEX™ Vest-Style Harness

Tech-Lite™ aluminum back D-ring, Duo-Lok™ quick connect buckles with memory fit.

SMALL: [1113001C](#) MEDIUM: [1113004C](#)
LARGE: [1113007C](#) X-LARGE: [1113010C](#)
SKU: 7030.258



ExoFit NEX™ Cross-Over Harness

Tech-Lite™ aluminum front and back D-rings, Duo-Lok™ quick connect buckles with memory fit.

SMALL: [1113091C](#) MEDIUM: [1113094C](#)
LARGE: [1113097C](#) X-LARGE: [1113100C](#)



EXOFIT XP™ & EXOFIT™ HARNESSSES



ExoFit XP™ Vest-Style Harness

Removable padding and stand-up back D-ring with impact indicator, belt loops and colour coded quick-connect buckles. Harness weight: 1.6kg (3.6lbs).

SMALL: [1110100C](#) MEDIUM: [1110101C](#)
LARGE: [1110102C](#) X-LARGE: [1110103C](#)
SKU: 7030.628



ExoFit XP™ Vest-Style Harness

Removable padding and stand-up back and shoulder D-rings, belt loops, and colour coded quick-connect buckles.

SMALL: [1110375C](#) MEDIUM: [1110376C](#)
LARGE: [1110377C](#) X-LARGE: [1110378C](#)
SKU: 7030.486



ExoFit™ Vest-Style Harness

Breathable non-removable padding, back D-ring, belt loops, quick-connect buckles.

SMALL: [1107975C](#) MEDIUM: [1107976C](#)
LARGE: [1107977C](#) X-LARGE: [1107981C](#)
SKU: 7030.214



ExoFit™ Cross-Over Harness

Front, back and side D-rings, loops for belt, quick-connect buckles.

SMALL: [1108700C](#) MEDIUM: [1108701C](#)
LARGE: [1108702C](#) X-LARGE: [1108706C](#)
SKU: 7030.234



TYPES OF HARNESSSES

Fall protection harnesses are available in different types, with various features, depending on their intended use.

Multi-Purpose Harness

This type typically includes extra attachment points which allow work in a variety of situations. The belt and pad provide additional back lumbar support, positioning rings and tool carrying options.



Work Positioning Harness

These harnesses have positioning D-rings located on the hips for use with pole straps or work positioning lanyards, which allow hands-free operation. They may also include integral waist belts.



Ladder Climbing Harness

Harnesses with a frontal attachment point, for connection to permanent ladder safety systems.



Descent Control Harness

These harnesses typically have frontal attachment points for use with descent control devices.




Confined Entry/Retrieval Harness

One attachment point located on each shoulder strap facilitates upright retrieval from confined spaces.



HARNESS SIZING

To find the correct harness size, use your weight and height on the chart below. Proper harness sizing is essential to your safety.

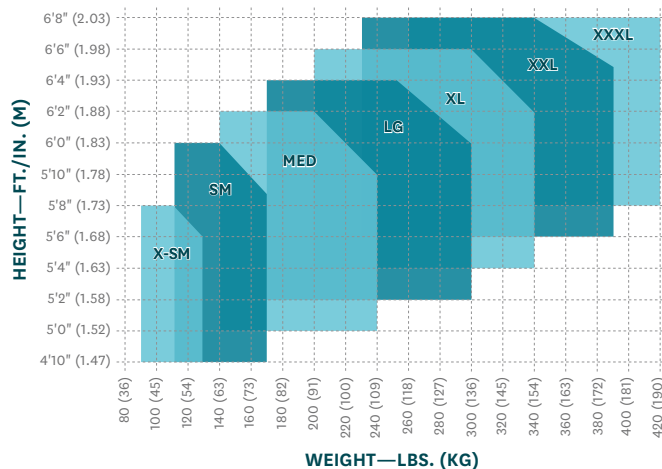

HARNESSES



Delta™ Vest-Style Harness

Back D-ring, tongue buckle leg straps. CSA, OSHA and ANSI approved.

UNI: [1102000C](#) XL: [1101252C](#)
SKU: 7030.206



Delta™ Vest-Style Harness

Back and side D-rings, tongue buckle leg straps. CSA, OSHA and ANSI approved.

UNI: [1102008C](#) XL: [1104875C](#)
SKU: 7030.216



Delta™ Vest-Style Harness

Back D-ring, quick-connect buckle leg and chest straps. CSA, OSHA and ANSI approved.

UNI: [1110600C](#) XL: [1110601C](#)
SKU: 7030.247



PRO™ Padded Harness

Construction harness, back, hip and leg padding, quick connect legs and chest, back D-ring, tongue buckle belt.

SML: [1191269C](#) MED/LG: [1191270C](#) XL: [1191271C](#)
SKU: 7030.261



PRO™ Harness

Vest style, back & side D-rings, pass thru buckle legs. ANSI approved.

SML: [1191204C](#) MED/LG: [1191205C](#) XL: [1191206C](#)
SKU: 7030.260



PRO™ Padded Harness

Vest style, back and leg padding, quick-connect legs and chest, back D-ring. ANSI approved.

SML: [1191252C](#) MED/LG: [1191253C](#) XL: [1191254C](#)
SKU: 7030.262



PRO™ Vest-Style Harness

Pass-thru buckle legs, back D-ring. ANSI approved.

SML: [1191200C](#) MED/LG: [1191201C](#) XL: [1191202C](#)
SKU: 7030.700



PRO™ Vest-Style Harness

Back D-ring and tongue buckle legs. ANSI approved.

SML: [1191236C](#) MED/LG: [1191237C](#) XL: [1191238C](#)
SKU: 7030.703





3M™ SafeLight™ Lightweight Harness

Full body harness with back D-ring.

SIZES: UNI [10810](#) SKU: 7040.025.001

3M



Trend-X Cross-Chest Harness

Back and front D-rings, polyester webbing, D-stop back strap.

SIZES: UNI [FP722-2DP](#) SKU: 7015.006.001

NORTH



Peakworks Compliance Full Body Harness

Quick connect chest and leg buckles, fall indicator, forged D-ring. CSA approved.

SIZES: UNI [FBH10002A](#) SKU: 7015.030.001



Full Body Harness

Polyester, large back D ring. Retail pack. CSA, OSHA and ANSI approved.

SIZES: UNI [MPFPD698-IDP](#) SKU: 9865.125.001

NORTH



Roofing Kit

10910 Harness, 209510/124 rope grab/lanyard combination, 2 disposable roof anchors, nails, 0221-50 rope lifeline. Comes in a bucket.

[20502](#) SKU: 7013.010.001

3M



LANYARDS



EZ Stop® II Shock Absorbing Lanyard

2.5cm (1") polyester web, snap hook at end, soft cover shock absorber. CSA, OSHA, ANSI/ANSI Z359 approved.

1.0m (3'): [1220007C](#) 1.2m (4'): [1220030C](#)
1.8m (6'): [1220006C](#) SKU: 7030.405



PRO™ Energy Absorbing Lanyard
100% tie-off, double leg with snap hook and flat steel rebar hook on leg end. ANSI approved.

1.2m (4'): [1340182C](#) 1.8m (6'): [1340180C](#)
SKU: 7030.595



PRO™ Energy Absorbing Lanyard
Single leg with snap hooks on ends. OSHA 1926 and ANSI Z359.1 compliant.

1.0m (3'): [1341002C](#) 1.2m (4'): [1341004C](#)
1.8m (6'): [1341001C](#) SKU: 7030.595



PRO™ Energy Absorbing Lanyard
Single-leg with snap hook and flat steel 6.4mm (¼") rebar hook on leg end. ANSI approved.

1.2m (4'): [1341006C](#) 1.8m (6'): [1340125C](#)
SKU: 7030.602



PRO-STOP™ Energy Absorbing Lanyard

Internal single leg lanyard with self locking snap hooks on ends. ANSI approved.

1.2m (4'): [1340221C](#) 1.8m (6'): [1340220C](#)
SKU: 7030.605



Shock Absorbing Lanyard

Partially oriented yarn single leg, snap connectors on both ends.

1.2m (4'): [SA-1000-4](#) SKU: 7010.015.004
1.8m (6'): [SA-1000-6](#) SKU: 7010.015.006



Lanyard

Polyester decelerator energy absorbing. Double locking snap hood at both ends. CSA approved.

1.2m (4'): [MPFPD29811/4](#)
1.8m (6'): [MPFPD29811/6](#)
SKU: 9865.200

LIFELINES & ROPE GRABS



Ultra-Lok™ RSQ™ Dual-Mode Self Retracting Lifeline

Galvanized steel wire rope, self-locking swivel snap hook. Includes standard fall arrest and automatic descent modes.

15.2m (50'): [3504550C](#)



Ultra-Lok™ Self Retracting Lifeline
Speed-sensing brake system, galvanized steel cable, steel swivel hook.

6m (20'): [3504433C](#) SKU: 7030.034.001
9m (30'): [3504430C](#) SKU: 7030.019.001
15m (50'): [3504450C](#) SKU: 7030.025.001



Rebel™ Cable Series Self-Retracting Lifeline

5mm galvanized cable, thermoplastic housing, carabiner.

10m (33'): [3590502](#) 15m (50'): [3590552](#)
20m (66'): [3590592](#) SKU: 7030.048



Rebel™ Self-Retracting Lifeline

Swivel snap and carabiner, rugged aluminium housing, stainless steel internal construction, cable and webbing options, 2-year warranty on parts and workmanship.

3m (10') CABLE: [AD210BC](#) SKU: 7030.027
3m (10') WEB: [AD110BC](#) SKU: 7030.026
6.1m (20') WEB: [AD120BC](#) SKU: 7030.042

LIFELINES & ROPE GRABS



Nano-Lok™ Self Retracting Lifeline

For direct connection to most harnesses. Can be used as a lanyard replacement. Multiple configurations available including single & twin leg. 726g (1.6lbs).

PROTECTOR



PRO™ Mobile Rope Grab

For use on 16mm (5/8") polyester/polypropylene lifeline. CSA, OSHA and ANSI approved.

5000003 SKU: 7030.453.001

EVA



Suspension Trauma Safety Strap

Connects to most harnesses (one pair). CSA approved.

9501403C SKU: 7030.648.001

PEAKWORKS



Lifeline

16mm (5/8") polysteel rope with carabiner on one end.

7.6m (25'): VL-1110-25

15m (50'): VL-1110-50

30m (100'): VL-1110-100 SKU: 7012.060

CONNECTORS & ACCESSORIES



Carabiner

Steel drop forged D-shaped carabiner, 19mm (3/4") gate opening.

FP86 SKU: 7012.023.001

NORTH



Temporary Roof Anchor

Disposable residential roof anchors, 22kN (5000lbs), 100mm (4") spiral nails.

FP90B SKU: 7012.040.001

PEAKWORKS



Reusable Roof Anchor

2.2T (5000lbs) anchorage point, forged alloy D-ring. Includes 20 16D nails.

RB-9800 SKU: 7030.608.001

EVA



Tie-off Adapter

3.2cm (1 1/4") polyester strength member, 7.6cm (3") polyester wear pad. Coated steel hardware. CSA, OSHA, ANSI and ANSI Z359 approved.

1m (3'): 1003000 1.8m (6'): 1003006

SKU: 7030.005

PEAKWORKS



Residential Anchor Sling

22.2kN (5000lbs). Natural polyester tie-down webbing. OSHA and ANSI approved.

1m (3'): RAS-3 SKU: 7030.046.001

EVA



Concrete D-ring Anchor

CSA, OSHA, ANSI and ASTM E488 approved.

2104560 SKU: 7030.039.001

EVA



Saflok® Concrete Wedge Anchor

EN795 Class B compliant. CSA and OSHA approved.

2100085 SKU: 7030.044.001

NORTH



Spectra® Web Loop Sling

Specialty Anchorage Connector.

0.6m (2'): FP242/2 1m (3'): FP242/3

1.2m (4'): FP242/4 1.8m (6'): FP242/6

SKU: 7010.040